



AGRICULTURAL MACHINERY

**sitrex**®



**BELT RAKE**

Distributed by: J. S. Woodhouse Co., Inc.  
1314 Union St  
West Springfield, MA 01089


Phone: 413-739-5607  
Fax: 413-732-3786  
email: [info@jswoodhouse.com](mailto:info@jswoodhouse.com)  
website: [www.jswoodhouse.com](http://www.jswoodhouse.com)

# BELT RAKE

Works quickly on any green or dry forage without damaging it thanks to the perfect elasticity of the tines which adhere to any type of soil permitting an excellent cleaning during the raking and moving phases. The windrow formed by the SITREX belt rake is never a long braid but rather a soft and light windrow. Exceptional performance in turning any kind of forage even at high forward speeds. All the ball bearings are watertight and require no lubrication.

SPECIFICATIONS	GS 190	GS 220
Width of effective work	75 inch. (1.90 mt.)	87 inch. (2.20 mt.)
Max. forward speed	7.5 miles/h	7.5 miles/h
Max. surface that can be covered	11.25 miles/h	11.25 miles/h
Transmission	belt	belt
Grease point	none	none
Hitch system	hydraulic lift	hydraulic lift
Max. width	95 inch. (2.40 mt.)	103 inch. (2.60 mt.)

A hitch for tractors with no three-point hydraulic lift will be provided on request.

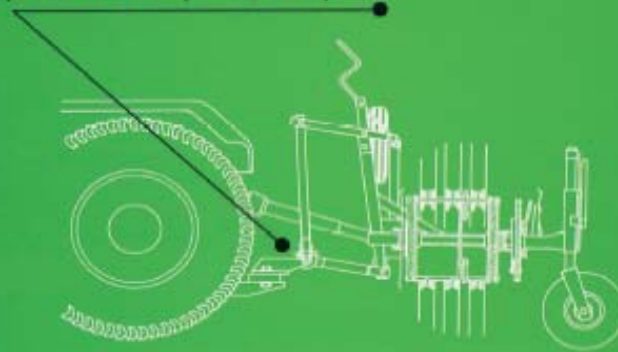

Distributed by: J. S. Woodhouse Co., Inc.  
1314 Union St  
West Springfield, MA 01089

Phone: 413-739-5607  
Fax: 413-732-3786  
email: [info@jswoodhouse.com](mailto:info@jswoodhouse.com)  
website: [www.jswoodhouse.com](http://www.jswoodhouse.com)