


# WESTFIELD®

## Utility Augers

4" - 6" - 7" - 8" - 10" - 13" - Diameters

### FOR PERMANENT OR SEMI-PERMANENT AUGER INSTALLATIONS

- At your grain bins or bulk tanks
- In drying set-ups
- Around the dairy barn
- In feedlots
- At feedmills or elevators

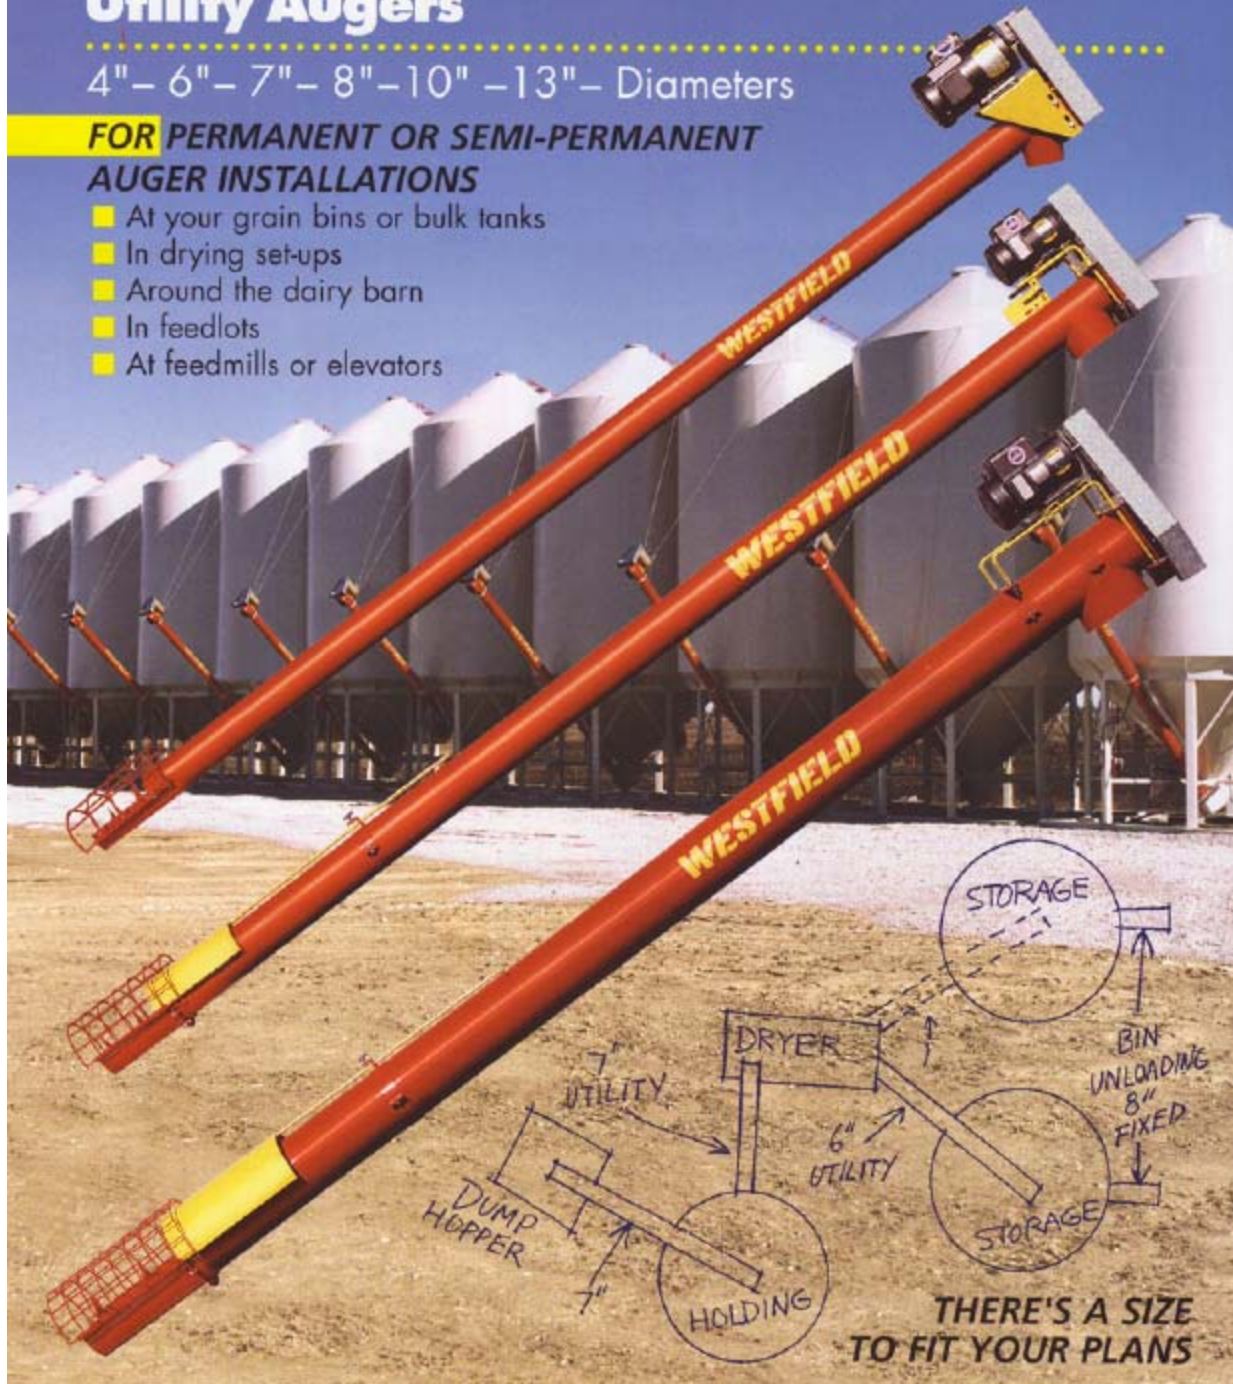

Distributed by: J. S. Woodhouse Co., Inc.  
1314 Union St  
West Springfield, MA 01089

Phone: 413-739-5607  
Fax: 413-732-3786  
email: [info@jswoodhouse.com](mailto:info@jswoodhouse.com)  
website: [www.jswoodhouse.com](http://www.jswoodhouse.com)

# Utility Augers



## 4" 11 ft. Basic Auger 5' AND 10' EXTENSIONS



Portable 4" auger, adjustable motor mount, shielded single "A" belt and pulley, and pre-lubricated top end bearing.



Shielded intake assembly bolts to basic drive section or extension, shown with optional adjustable feed control.



Handy swivel mount bracket for quick mounting to truck box, wagon or feed bin.

## 6"-7"-8"-10" 16 ft. Basic Auger 5', 10' OR 15' EXTENSIONS 13" 21 ft. Basic Auger 5', 10' OR 20' EXTENSIONS




Upper drive has heavy duty flangette ball bearing and adjustable motor mount with double "B" belts and pulley (triple belts on 13" models).



Shielded intake assembly shown with optional adjustable feed control for 6"-10" models.



Bolt-on flight support bushing with grease fitting (standard on 13" models).



Bolt-on tube clamps for attaching support bracing.



Handy steel hopper with flight support bearing. Also available with hinged lid for 6" to 10" models.

### OTHER OPTIONS (Not shown)

- Flex Spout – directs flow of grain
- Handy Poly Hopper
- Triple Groove Pulley and three belts for longer 10" augers
- \*NOT SUPPLIED – Electric motor, pulley, and switches.



Truss kits to support longer auger installations – 6" to 10" models.

SPECIFICATIONS	4"	6"	7"	8"	10"	13"
Recommended pulley size for 1750RPM motors	1A 2" - 2 1/4"	2B 3 1/2" - 4"	2B 3 1/2" - 4"	2A 3 1/2" - 3 3/4"	2A 3 1/2" - 3 3/4"	3B 3 1/2" - 3 3/4"
Flight speed	440 - 490	480 - 550	480 - 550	445 - 480	380 - 410	355 - 380
Auger pulley supplied	1A#	2B 12.2"	2B 12.2"	2B 12.7"	2B 13"	3B 16"
Belt(s) supplied	1 - A33	2 - B48	2 - B51	2 - B51	2 - B62	3 - B67
Extensions available	5' - 10'	5' - 10' - 15'	5' - 10' - 15'	5' - 10' - 15'	5' - 10' - 15'	5' - 10' - 20'
Tube gauge	16	16	16	14	14	12
Flight gauge	13	12	12	10	7	7

NOTE: Recommended motor pulley sizes are for 1750 RPM electric motors. For intermittent feed, a slightly smaller pulley will allow easier startup under load. Specifications are subject to change without notice or obligation.

HORSE POWER REQUIREMENTS*	4"	6"	7"	8"	10"	13"
11'	3/4	●	●	●	●	●
16'-21'	3/4 - 1	1 1/2 - 2	2 - 3	3	3 - 5	10
26'-31'	1 - 1 1/2	3	3 - 5	5	5 - 7 1/2	15
36'-41'	1 1/2 - 2	3 - 5	5 - 7 1/2	5 - 7 1/2	7 1/2 - 10	20
46'-51'	2 - 3	5	7 1/2	7 1/2 - 10	10 - 15	●
56'-61'	●	7 1/2	7 1/2 - 10	10	15 - 20	●

\*With dry grain. Full tube of high moisture grain will require additional horsepower.



## SAFETY FIRST

Some features are shown with safety shields removed for clarity. DO NOT operate auger with safety shields removed. Read and understand operators manual before operating.



Distributed by: J. S. Woodhouse Co., Inc.  
1314 Union St  
West Springfield, MA 01089

Phone: 413-739-5607  
Fax: 413-732-3786  
email: info@jswoodhouse.com  
website: www.jswoodhouse.com